

## Aru patio FOLD 78 SOFTLINE IN


### Inward opening bifold wooden terrace door

- Made to Measure Sizes
- Jamb 78 mm
- Sash profile thickness 78 mm
- Timber selection:
  - fingerjointed, knotted or selected laminated pine timber;
  - laminated oak timber
- Standard timber threshold
- Timber finishing with water-based paint or stain. Paint according to RAL color chart, stain according to manufacturer's samples.
- Triple glazing, thickness 42 mm
- Glazing from the inside with wooden glazing bead, fastened with hidden nails and sealed with silicone
- Color range of fittings - silver, white and brown
- Glazing bar options:
  1. Penetrating bars
  2. Norwegian style - glued on both sides + slats inside the glazing
  3. Georgian style - glued on both sides
  4. Removable on the outside
  5. Decorative bars inside the glazing


Door width max 6000 mm  
 Door height max 2536 mm  
 Sash width 486 ... 936 mm  
 Sash weight max 80 kg




#### OPENING inside view

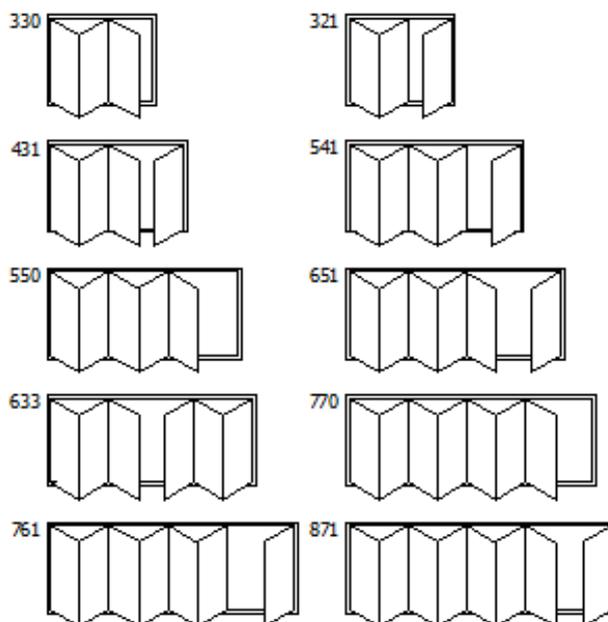

A single active door leaf is also possible as a tilt&turn opening

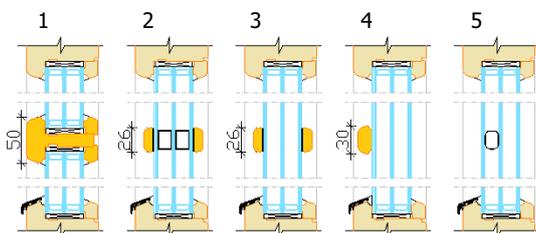

- Extras:
  - Different handles (lockable handles, design handles, Active door leaf with 2-sided handle and DIN lock)
  - Special glasses (toughened, laminated, pattern, sun protection, self cleaning etc.)
  - different „warm edges“ for glass unit
  - aluminium KOMFORT-Ithreshold
  - dual-color finishing (different on inside and outside)
  - jamb extensions
  - external alu cills

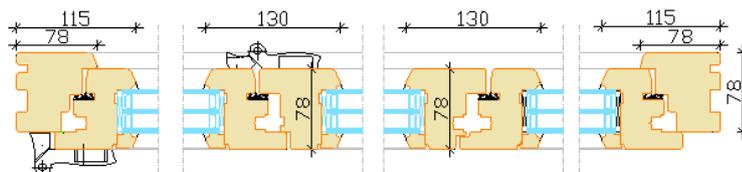

Horizontal section of the 3-piece folding door (scheme 321)

